



# Moving Infantry Target

(MIT)



RANGE AND TRAINING LAND PROGRAM – MANDATORY CENTER OF EXPERTISE

U.S. ARMY ENGINEERING AND SUPPORT CENTER, HUNTSVILLE

HUNTSVILLE, ALABAMA

256-895-1534

[EMAIL RTLP](#)

## General

The Moving Infantry Target (MIT) emplacement is used for the installation of a MIT target. There are two standard lengths, 15m and 40m; an additional 2m space is provided at one end for the installation of the electrical equipment. See the standard Civil and Electrical detail drawings for specific dimensions and details. The normal position for the MIT emplacement is at a 45-degree angle to the engagement point, though the angle can vary from 30 to 90 degrees. The block outs for the Load Center (LC) and Master Target Data Panel (MTDP) are located at the end of the emplacement closest to the engagement point.

Range designers should refer to the Inspection Checklists provided in the RDG to ensure that all required items are included in the design.

## Civil/Siting

This section covers the Civil Engineering and Siting issues unique to this type of emplacement. Refer to the separate range sections of the RDG for additional siting issues specific to a particular range. See the special sections below for additional information particular to a specific target type.

## Emplacement

The standard MIT uses a concrete emplacement with a geotextile/gravel drainage layer, a treated railroad tie front wall protection, and a protective earthen berm. Either precast or cast-in-place concrete is acceptable. Differential settlement between precast sections is not allowed. Installations may prefer to use other materials, which is acceptable as long as it is durable, provides protection, and is compatible with the electrical and target equipment. The compacted earth berm provides the protection for the coffin and installed equipment from all anticipated directions of fire. The concrete emplacement does not provide significant protection.

Mount all MIT emplacement permanent electrical and communication boxes on the front wall of the emplacement no less than 50 mm (2 in) below the top of the emplacement wall. This mounting height helps protect them from rounds that might skim over the top of the berm. The targetry provider installs the target mechanism on the floor of the concrete emplacement as far forward as practical to minimize its potential to be hit by a low round, yet still allow access to the electrical/data boxes.

### Above-Grade Emplacement

Above-grade emplacements are the most common in range construction due to their ease of drainage, ease of obtaining line-of-sight, and small disturbance to the existing grade.

### Below-Grade Emplacement

Below grade emplacements blend with the natural terrain and do not present the target position profile to the soldier/firer. Unfortunately, below-grade emplacements present several design issues as follows:

#### Drainage:

Positive drainage is harder to achieve on a below grade emplacement. Floor drains are problematic in that they require a lower elevation nearby for a daylight drain and tend to clog. Drainage swales increase excavation requirements.

#### **Unexploded Ordnance (UXO):**

UXO disturbance potential increases with the depth of excavation. While an above-grade emplacement might only require disturbing the surface to 150mm (6in) below natural grade, below-grade emplacements often require excavation of 1m (3ft) or more. For medium and high risk areas, normally a subsurface clearance to a depth of one foot below the construction footprint is required.

#### **Line-of-Sight:**

Line-of-sight between the firing position and the target emplacement may not be possible using the natural terrain.

#### **Other debris:**

Below-grade emplacements also tend to gather more sand, dirt and windblown debris, which can cause maintenance problems.

The designer should discuss with the installation whether they desire above- or below-grade MIT emplacements, while ensuring that the installation understands the design issues and costs associated with either choice.

### **Drainage**

Ensuring proper drainage is critical in the design and construction of target emplacements. Even though the electrical and target equipment is designed for outdoor installation, many of the issues with range targetry can be avoided with proper emplacement drainage. The ground should slope away from the emplacement whenever possible; add swales as necessary to ensure positive drainage. The floor of the emplacement must slope to the rear. Special care is required in the use of floor and trench drains, as they tend to clog easily and freeze in some climates. Ensure proper compaction under the emplacement to avoid differential settlement. Drainage is especially critical on newly constructed ranges before vegetation is fully established.

### **Target Clearance**

No obstruction may be present which interferes with travel of the target along the entire length either in the up or down position. Provide a minimum of 2.3m (7.5ft) clear space from the face of the emplacement wall along the entire length of the MIT.

### **MIT Slope**

The MIT targetry is required to be able to travel on a maximum grade of 10 percent. In general practice, design the emplacement with a maximum slope of 5 percent to allow for use in adverse weather.

Vertical or horizontal curves are not allowed.

## Wall Height

The front wall and berm must be high enough to protect the targetry equipment while still allowing the target to be visible from the firing position. The standard (minimum) front wall height is 660mm (26in). The height has been coordinated within the program as the minimum that hides both the electrical equipment and the targetry based on a relatively flat angle of fire from the shooter to the target, generally +/- 2 degrees.

## Angle of Fire

The angle of fire (AOF) from the gun barrel to the target is a critical parameter on a range that affects the functionality in a number of ways. Certain range and weapon types have a limit on the allowable angle of fire, e.g. a Known Distance range limits the AOF to +/- 2 degrees. Refer to the installation trainers, applicable training manuals, and the RDG section for specific range types for additional information and guidance. In addition, the amount of the target that is visible to shooters can affect the ability to qualify, e.g. it is harder to qualify on a MRF when only half of the target is visible. Finally, rounds can hit and damage targetry and electrical equipment on higher angles of fire.

The standard MIT emplacement with a 26-inch front wall and a 2-percent slope on the berm provides adequate protection for AOF of +/- two degrees. Greater angles require special design consideration. Higher negative angles may require increasing the front wall height, adjusting the slope of the berm to match the AOF, or some other method. Theoretically, the minimum wall height hides the electrical equipment, including the target arms and clamps, up to a -8° AOF. In situations with a positive AOF, greater than 2 degrees, the berm itself begins to hide the target. Adjustments to the berm slope may be necessary. Note that the direction of fire (angle to the firing line) affects the allowable angle of fire as well.

On ranges where target engagement is from multiple points, the designer must coordinate closely with the installation and the targetry provider to determine the correct front wall height. The emplacement protection is also critical for aviation gunnery.

## Berm Criteria

The Target Protection Design Curves in the RDG provide the recommended thickness for emplacement protective berms. The berm must protect the emplacement from all anticipated directions of fire. The berm should be thickest in the expected direction of fire. Use thinner berms to protect the emplacement from occasional directions of fire and ricochets.

Determine the berm thicknesses based on projectile type, soil compaction, and the in-place soil density. However, the designer must also coordinate with the range trainer or user to determine the appropriate berm thickness for each target, since individual target siting may dictate added target protection. For example, when SIT emplacements is in front of or behind a MAT or SAT, the emplacements will need to be designed to withstand the largest weapon system that will engage that group of targets. At a minimum, berm widths will be at least 4 feet to facilitate ease of maintenance.

Historical experience shows that, under normal usage, well-compacted berms, designed with the recommended widths require maintenance on 6-month cycles. Heavily used ranges and individual targets often require increased berm thicknesses.

## Weather Considerations


In regions with large quantities of blowing sand or snow, consider providing elevated target mechanism platforms and emplacement covers. The elevated target mechanism platform allows for shoveling out snow and sand, while the emplacement cover keeps the accumulation of blown or fallen material to a minimum. Consider access for snow removal equipment as well.

## Electrical/Communications

This section discusses electrical/communication considerations unique to this specific emplacement type. Downrange power, communication, transformers, trenching requirements, etc., are discussed in the Downrange Distribution Section of this document.

### Target Emplacement Wall Configuration

Refer to Emplacement Elevation Drawings for a typical target emplacement wall configuration. The electrical equipment required in each MIT emplacement are the 1) Load Center (LC), 2) Target Power Receptacle (TPR), 3) Auxiliary Power Receptacle, 4) GFCI Maintenance Receptacle (MR), 5) and the data enclosure, along with the associated wiring and conduits which are not detailed in this document. The load center contains the secondary branch circuits and provides feed-through capability to the load center in the next adjoining target emplacement. All boxes and receptacles on the front wall of the emplacement should be mounted no higher than two inches from the top of the emplacement wall; this protects the boxes and receptacles from low rounds that might skim the top of the emplacement wall. A detailed drawing of the electrical equipment requirements for MIT emplacements is provided in the Appendix of this design guide.

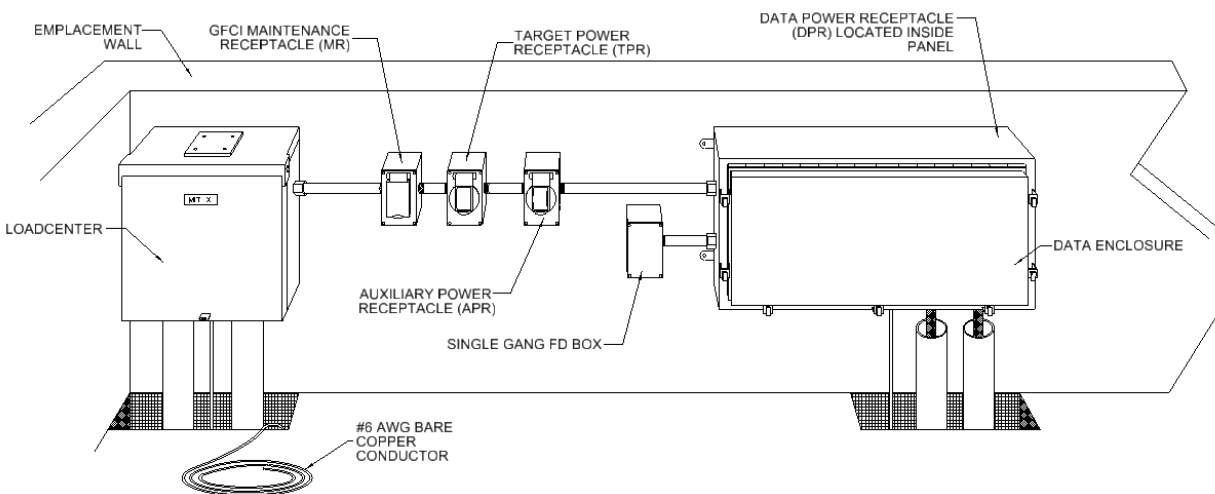

*REPRESENTATIVE MIT ELEVATION DRAWING (NOT TO SCALE)*

## Routing

All conduits and/or cables should enter and exit from the side or rear of the emplacement. This cable routing helps to minimize damage to the cables from range operations and maintenance crews performing berm repair.



## Grounding

Grounding is required for safety at each downrange emplacement or equipment location. A 19mm (3/4in) by 3,050mm (10ft) copper-clad steel ground rod will be driven to a depth of 305mm (1ft) below finished grade at each emplacement or equipment location. The MTDP/TDP and load center equipment will be connected to the emplacement's single ground rod with a #6 AWG bare copper conductor and exothermically welded connections. All data cable armor or shields must be bonded to the ground bar in the TDP. The design will leave an 1829mm (10ft) coil of #6 AWG bare copper that will be used to ground the target mechanism.

## Surge Suppression

Provide surge protective devices (SPD) in the load center of all target emplacements. The surge suppression for the data communication cables will be provided by the target vendor during the installation of targets.

## Conduit and Cable Fittings


**All penetrations into the MTDP or TDP must be made with fittings approved for use with a NEMA 4, 4X or 6P enclosure. Non-compliance with this requirement will result in equipment failure.** Sheet ED-01 in the Range Design Guide illustrates the preferred sealing method. **Foam filled conduits are not acceptable.** The MIT load center only requires a NEMA 3R rated enclosure. Provide fittings approved for use with a NEMA 3R enclosure for connection to the load center.

## Target Outlets

TPRs and APRs must be equipped with a waterproof enclosure approved for use with the power plug inserted and unattended, according to NEC 406.8(B) (2). The standard TPR configuration is shown in the Table below:

TARGET POWER RECEPTACLE	AUXILIARY POWER RECEPTACLE	FIBER OPTIC CABLE CONNECTORS	CATEGORY 5E OR BETTER CABLE CONNECTORS
NEMA L14-20R	NEMA L5-20R	Type "SC"	MALE, RJ45

*MIT EMPLACEMENT TARGET INTERFACE SPECIFICS*

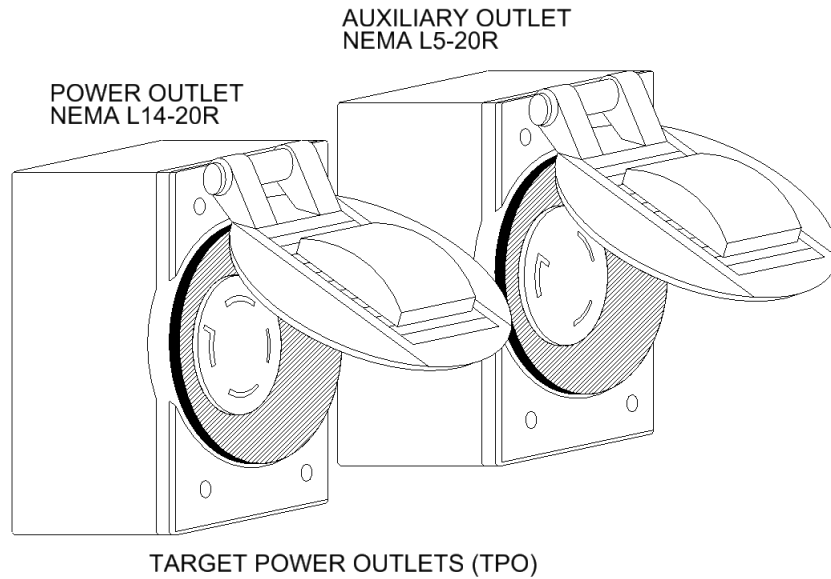

*TARGET POWER RECEPTACLE (TPR) – AUXILIARY POWER RECEPTACLE (APR)*

EMPLACEMENT TYPE	POWER FEED TYPE	PEAK	STATIC LOAD	DESIGN LOAD
MIT	120/240VAC Single Phase	2kVA While moving.	50VA	2kVA


*MIT EMPLACEMENT TARGET POWER TABLE*

## Standard Target Interface

All targets operate at 240 V. Power is supplied to the target through a 120/240V cord and plug connection. The target emplacement shall be provided with a standard 120/240V receptacle that is supplied power through a circuit breaker that is located inside the target emplacement. An auxiliary 120 V outlet is provided in the target emplacement for additional devices or training aids that may be added to the target mechanism. Thermal blankets are the most common devices that are added to the target mechanisms that utilize this power outlet. The specific components used to supply power to the target mechanisms installed inside each target emplacement is fully defined in the remaining sections.

Target and training device communication is accomplished by equipment installed inside the data enclosure located in each target emplacement. All networking equipment will be provided with the target mechanism when the target mechanism is purchased. The target mechanisms are normally purchased with Other Appropriations-Army (OPA) funded target installation contracts.

The range data infrastructure should be installed with data cables to the target emplacement and these cables should be properly terminated inside the target emplacement data enclosures. These data enclosures are referred to as either a Target Data Panel (TDP) or a Master Target Data Panel (MTDP), and they are fully defined in other sections of this document. The target mechanism installer will interface with the data cables inside these enclosures during the installation of the targets. The schematic below provides an overview of the wiring responsibilities inside the data enclosures.

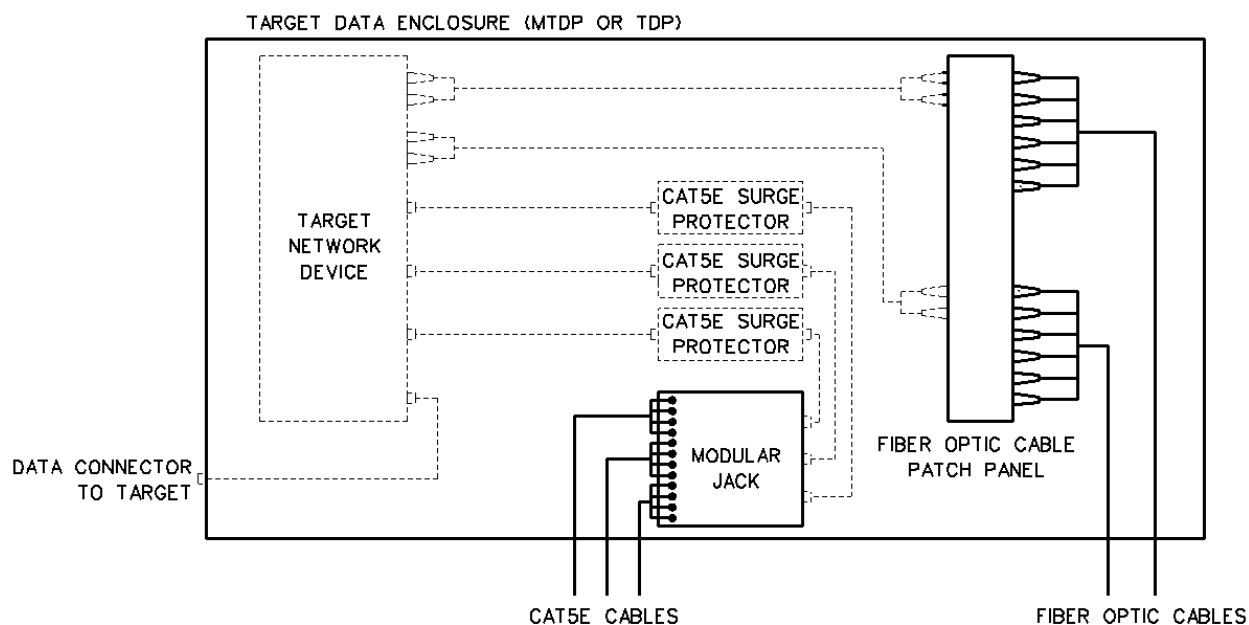

**MTDP DATA WIRING SCHEMATIC**

— RANGE INFRASTRUCTURE  
 - - - - - TARGET EQUIPMENT


**MTDP DATA WIRING SCHEMATIC**

The Master Target Data Panel (MTDP), or the Target Data Panel (TDP) must be rated NEMA 4, 4X, or 6P depending on environmental conditions (refer to Conduit and Cable Fittings section below for connections). The MTDP/TDP contains the electronics for local target operation, including data cable splicing and terminations. Data cabling shall enter and exit the data panels through approved cable seal fittings (refer to Conduit and Cable Fittings below). All fiber optic cabling will be terminated with SC type connectors, and the network cables will be terminated with CAT 5e or better rated RJ45 connectors. The MTDP and TDP provides space for Other Appropriations-Army (OPA) funded equipment which may include the fiber optic jumpers, switch/media converter, target data outlet, and network cables. The OPA equipment is installed by others and not the MILCON contractor. The designer must ensure the dimensions of the data panel are consistent with those dimensions stated on the detail plans for the MTDP and TDP equipment. A 120v AC power outlet is provided in the TDP for “Use by Others”. The TDP and the GFCI maintenance receptacle may utilize the same power circuit, but the TDP equipment must be wired ahead of the maintenance to ensure no nuisance tripping occurs. Reference the Electrical and Civil Details in the directory of the Range Design Guide for more information pertaining to the MTDP, TDP and their mounting requirements.



## Target Data Connection

All automated targets are connected to the data cable infrastructure through copper patch cables provided by the target vendor. The interface point between the facility infrastructure and the target installation occurs through the faceplate in the weatherproof outlet box installed immediately adjacent to the MTDP or TDP enclosure. The target vendor will penetrate the face plate on the outlet box and install a weatherproof coupling mechanism that mates with the patch cord provided with their targets.

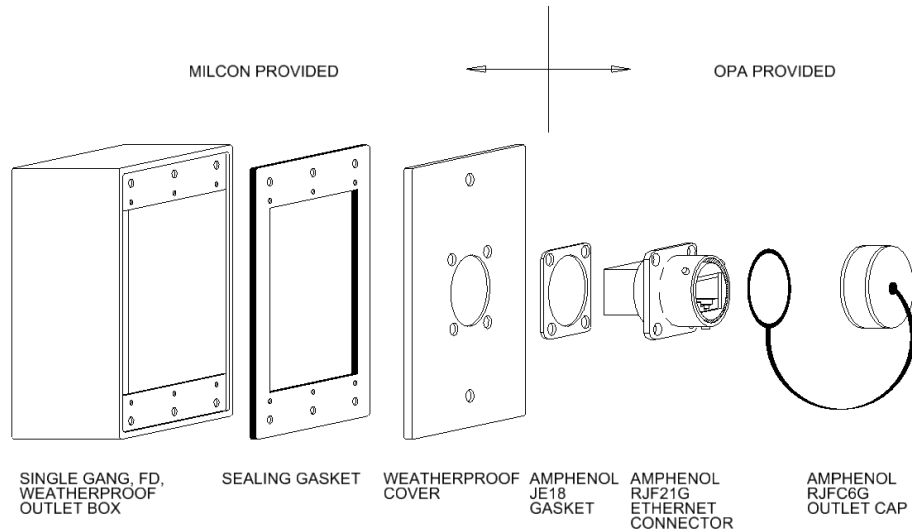

### TARGET DATA CONNECTION

## Environmental Limits



The temperature and humidity limits for electronic equipment are as follows:

### Outdoor:

- Non-operating and operating temperature: -34°C (-30°F) to 60°C (140°F).
- Humidity: 5% to 95% RH (non-condensing).



*REPRESENTATIVE MIT PHOTOS*

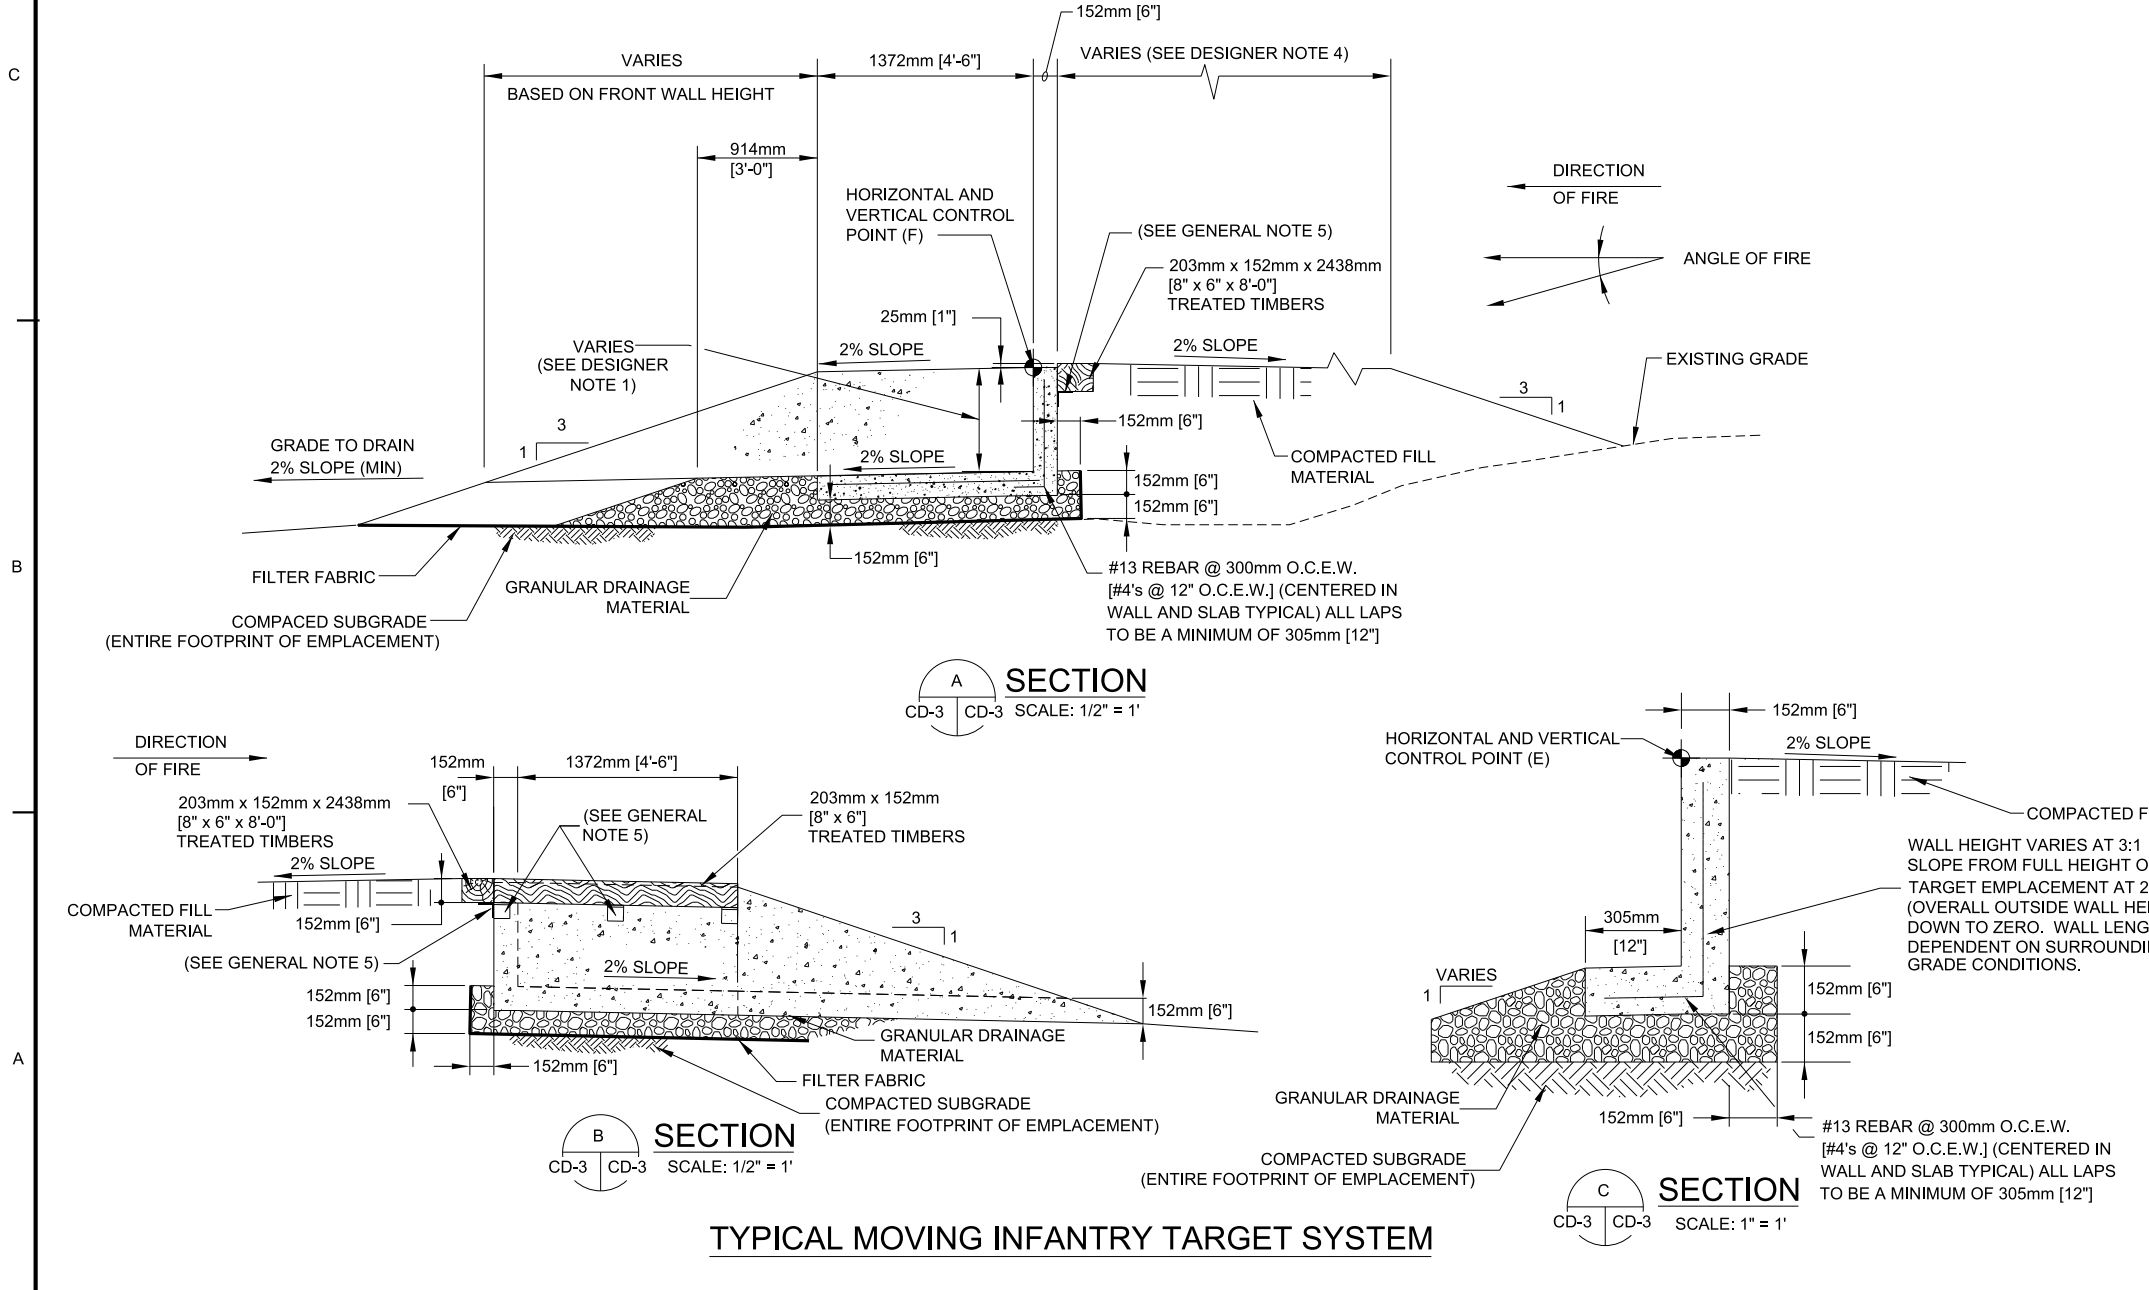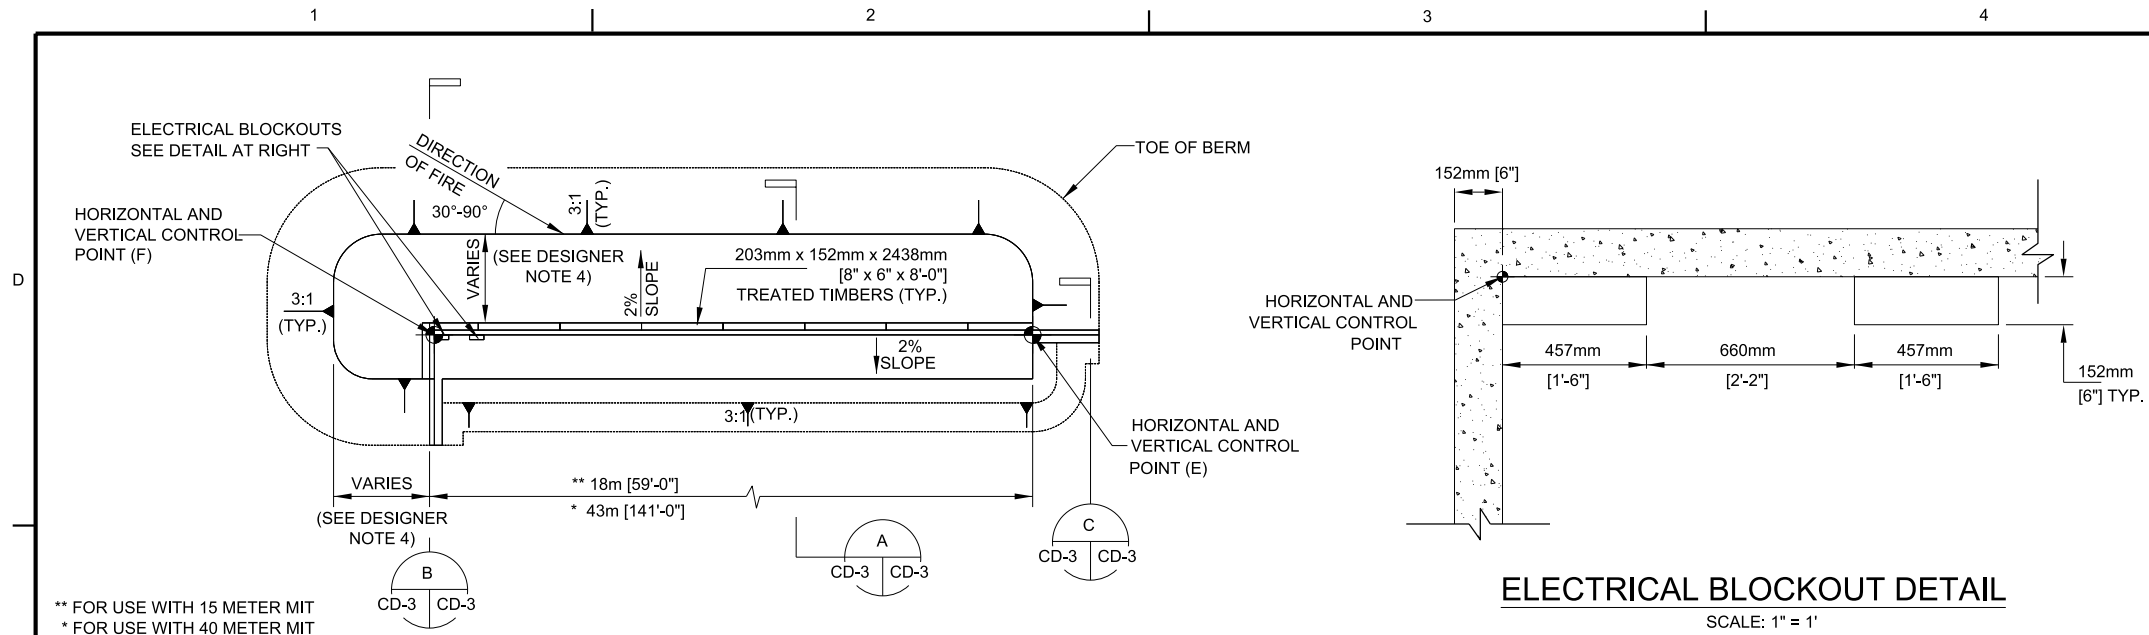

US ARMY CORPS OF ENGINEERS

DESIGNED BY: \$\$\$DESIGNER\$\$\$  
DRAWN BY: \$\$\$DRAWER\$\$\$  
SUBMITTED BY: \$\$\$SUBMITTER\$\$\$  
DATE: \$\$\$DATE\$\$\$

REVIEWED BY: \$\$\$REVIEWER\$\$\$  
CHECKED BY: \$\$\$CHECKER\$\$\$  
DATE: \$\$\$DATE\$\$\$

CONTRACT NO.: \$\$\$CONTRACT\$\$\$  
CATEGORY CODE: \$\$\$CATEGORY\$\$\$  
PROJECT NAME: \$\$\$PROJECT\$\$\$  
PLOT DATE: \$\$\$PLOT\$\$\$  
PLOT SCALE: \$\$\$SCALE\$\$\$


U.S. ARMY CORPS OF ENGINEERS  
ENGINEERING & SUPPORT CENTER  
HUNTSVILLE, AL

RANGE AND TRAINING LAND PROGRAM  
STANDARD DESIGN MANUAL

MOVING INFANTRY  
TARGET (ABOVE GRADE)

PLATE  
REFERENCE  
NUMBER  
CD-03  
SHEET/PAGES

\$\$\$STATUS\$\$\$

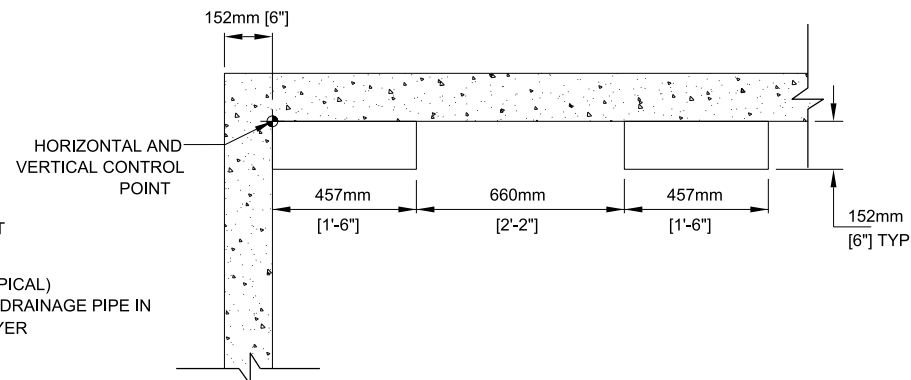


### ASCENDING SLOPE OR BELOW GRADE EMPLACEMENT

SCALE: 1" = 10'

## ELECTRICAL BLOCKOUT DETAIL


SCALE: 1" = 1'

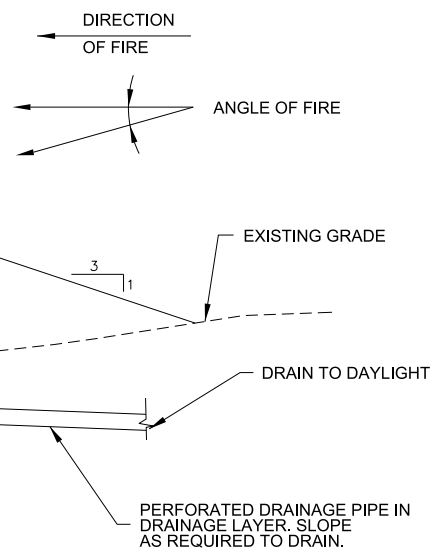

## A SECTION

SCALE: 1"= 2'

GRAPHIC SCALES:

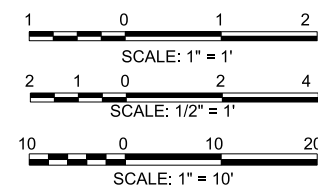

GENERAL NOTES:

1. CONCRETE SHALL DEVELOP A MINIMUM COMPRESSIVE STRENGTH OF 28 MPa (4000PSI) IN 28 DAYS.
2. EMPLACEMENTS SHALL BE CONSTRUCTED OF REINFORCED CONCRETE; CONCRETE STRUCTURES SHALL BE PRECAST OR CAST-IN-PLACE. PRECAST STRUCTURES WILL HAVE LIFTING EYES CUT FLUSH. PRECAST SECTIONS SHALL BE KEYPED.
3. ALL REINFORCING STEEL SHALL BE PER ASTM A615, GRADE 60.
4. AREAS DISTURBED BY CONSTRUCTION ACTIVITIES SHALL BE REVEGETATED OR RESURFACED CONSISTENT WITH THE NATURAL SURROUNDINGS, GROUND COVER SHALL NOT REDUCE TARGET VISIBILITY.
5. PLACE TREATED TIMBERS AGAINST CONCRETE WALL ON L102mm x 102mm x 12.7mm x 102mm (4"x4"x½"x4") STEEL ANGLES SPACED A MAXIMUM OF 914mm (3') ON CENTER. ATTACH ANGLE TO CONCRETE WITH CONCRETE ANCHORS.
6. ALL DIMENSIONS ARE METRIC [ENGLISH] UNLESS OTHER WISE INDICATED FOR INSTANCE 1372mm [4'-6"].
7. THE EMPLACEMENT MAY BE MIRRORED FROM WHAT IS SHOWN HERE, THE ELECTRICAL BLOCK OUTS ARE LOCATED AT THE END OF THE EMPLACEMENT NEAREST TO THE ENGAGEMENT POINT.
8. HORIZONTAL CONTROL POINT (F) IS LOCATED ON THE POWER SIDE OF THE TARGET.
9. LABEL EACH EMPLACEMENT. COORDINATE WITH RANGE CONTROL FOR NUMBERING SCHEME.

NOTES TO DESIGNER:

1. MINIMUM FRONT WALL HEIGHT IS 660mm (26"). THE FRONT WALL MUST BE HIGH ENOUGH TO PROTECT THE TARGETRY EQUIPMENT WHILE STILL ALLOWING MINIMUM OF 90% OF THE TARGET TO BE VISIBLE FROM THE FIRING POSITION. THE MINIMUM WALL HEIGHT OF 660mm (26") PROVIDES TARGET EQUIPMENT PROTECTION UP TO A 8° ANGLE OF FIRE. (THE TARGET ARMS AND CLAMP ARE NOT PROTECTED ABOVE 3°.) IT ALSO ALLOWS 90% VISIBILITY DOWN TO A -1° ANGLE OF FIRE. A GEOMETRIC ANALYSIS WILL BE REQUIRED FOR ANGLES OF FIRE GREATER THAN 8° OR LESS THAN -1°. THE HORIZONTAL DIRECTION OF FIRE MUST ALSO BE FACTORED INTO THE ANALYSIS. ANGLES OF FIRE OVER 8° MAY REQUIRE INCREASING THE HEIGHT OF THE FRONT WALL. ANGLES OF FIRE LESS THAN -1° MAY REQUIRE RAISING THE TARGET LIFTER OR INSTALLING LONGER TARGET ARMS. ON RANGES WHERE TARGETS ARE ENGAGED FROM MULTIPLE POINTS, THE DESIGNER MUST COORDINATE CLOSELY WITH THE INSTALLATION AND THE TARGETRY PROVIDER TO DETERMINE THE CORRECT FRONT WALL HEIGHT.
2. RETAINING WALLS SHALL BE CONSTRUCTED OF ADEQUATELY CONNECTED TIMBERS OR RAILROAD TIES (MAY BE PREFABRICATED) OR PRECAST OR CAST IN PLACE CONCRETE. FILTER FABRIC SHALL BE INSTALLED BEHIND ALL WOOD RETAINING WALLS. FILTER FABRIC SHALL EXTEND THE FULL HEIGHT OF THE WALL.
3. THE DESIGNER HAS THE OPTION TO USE THE BELOW GRADE EMBLEMENT DESIGN TO PROVIDE MORE REALISTIC TRAINING. IF THE SITE CONDITIONS ARE NOT ADEQUATE TO SUPPORT POSITIVE DRAINAGE OF THE TARGET EMPLACEMENT, THE TOP OF THE SUBGRADE SHOULD HAVE A MINIMUM LONGITUDINAL SLOPE OF 2% TOWARD THE FRONT OF THE EMBLEMENT.
4. REFER TO THE BERM THICKNESS FIGURES LOCATED IN THE DESIGN MANUAL TO DETERMINE REQUIRED BERM THICKNESS.
5. BERM SLOPES SHOWN AS 3:1 ARE TYPICAL. DIFFERENT SLOPES MAY BE REQUIRED BY THE SITE SPECIFIC GEOTECHNICAL REPORT.
6. FOR LOCATIONS REQUIRING DIRECTION OF FIRE FROM THE RIGHT OF THE TRACK CENTERLINE, PLANS AND SECTIONS SHOULD BE ANNOTATED FOR CONSTRUCTION IN A MIRROR IMAGE CONFIGURATION TO THAT SHOWN, WITH THE ELECTRICAL EQUIPMENT BEING PLACED AT THE END OF THE EMBLEMENT NEAREST TO THE FIRING POSITION.
7. WHERE EMBLEMENT IS SITED IN FRONT OF AN ARMOR TARGET, USE LARGER PROJECTILE TO DESIGN EMBANKMENT.
8. MINIMUM 2286mm [7'-6"] CLEAR SPACE FROM FRONT WALL REQUIRED.
9. MITS ARE NORMALLY PLACED SO THAT THE TRACK IS LEVEL ALONG ITS LENGTH. IF A SLOPE IS REQUIRED, IT IS RECOMMENDED THAT THE SLOPE BE LIMITED TO 3% WITH A MAXIMUM OF 5%.

[illegible]

U. S. ARMY CORPS OF ENGINEERS ENGINEERING & SUPPORT CENTER HUNTSVILLE, AL	DESIGNED BY:	DATE:
	DESIGNED BY:	DATE:
	DRAWN BY:	REVIEWED BY:
	SUBMITTED BY:	CONTRACT NO.:
	FILE NAME:	CATEGORY CODE:
SIZE: B	PLOT SCALE:	PLOT DATE:

RANGE AND TRAINING LAND PROGRAM  
STANDARD DESIGN MANUAL

---

# MOVING INFANTRY TARGET (BELOW GRADE)

PLATE  
REFERENCE  
NUMBER  
**CD-04**  
SHEET/PAGES